


Magnetic Heating Unit

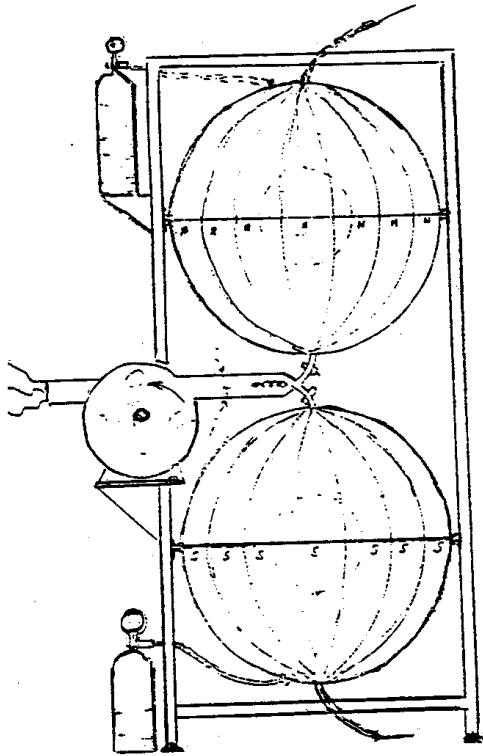

3) One 'O' ring seal to join two _____ which form a sphere.

4) An outer layer of 92 thousand (.092) thick plastic magnet material all one NORTH polarity facing in _____

18) Are vent holes to allow _____ adjusted as needed.

19) A standard heater type air blower used to pull the blended energy mixture out of chamber 17, cause it to be mixed with air, then drive the heat to areas requiring heating _____



11) An 'O' ring seal to allow pressure Part # 10 _____

13) A 3 inch copper ball, polished center of part 10 with non-metal rod _____


16) A bottle of a combination heat to flow into # 10 _____

the gas which is predicted to flow into Part #2

PARTS LIST:

1) Is an outer non-metal frame to hold spheres and an air blower

6) A coaxial cable wire insulated from Part #2 and firmly secured to Ball #5

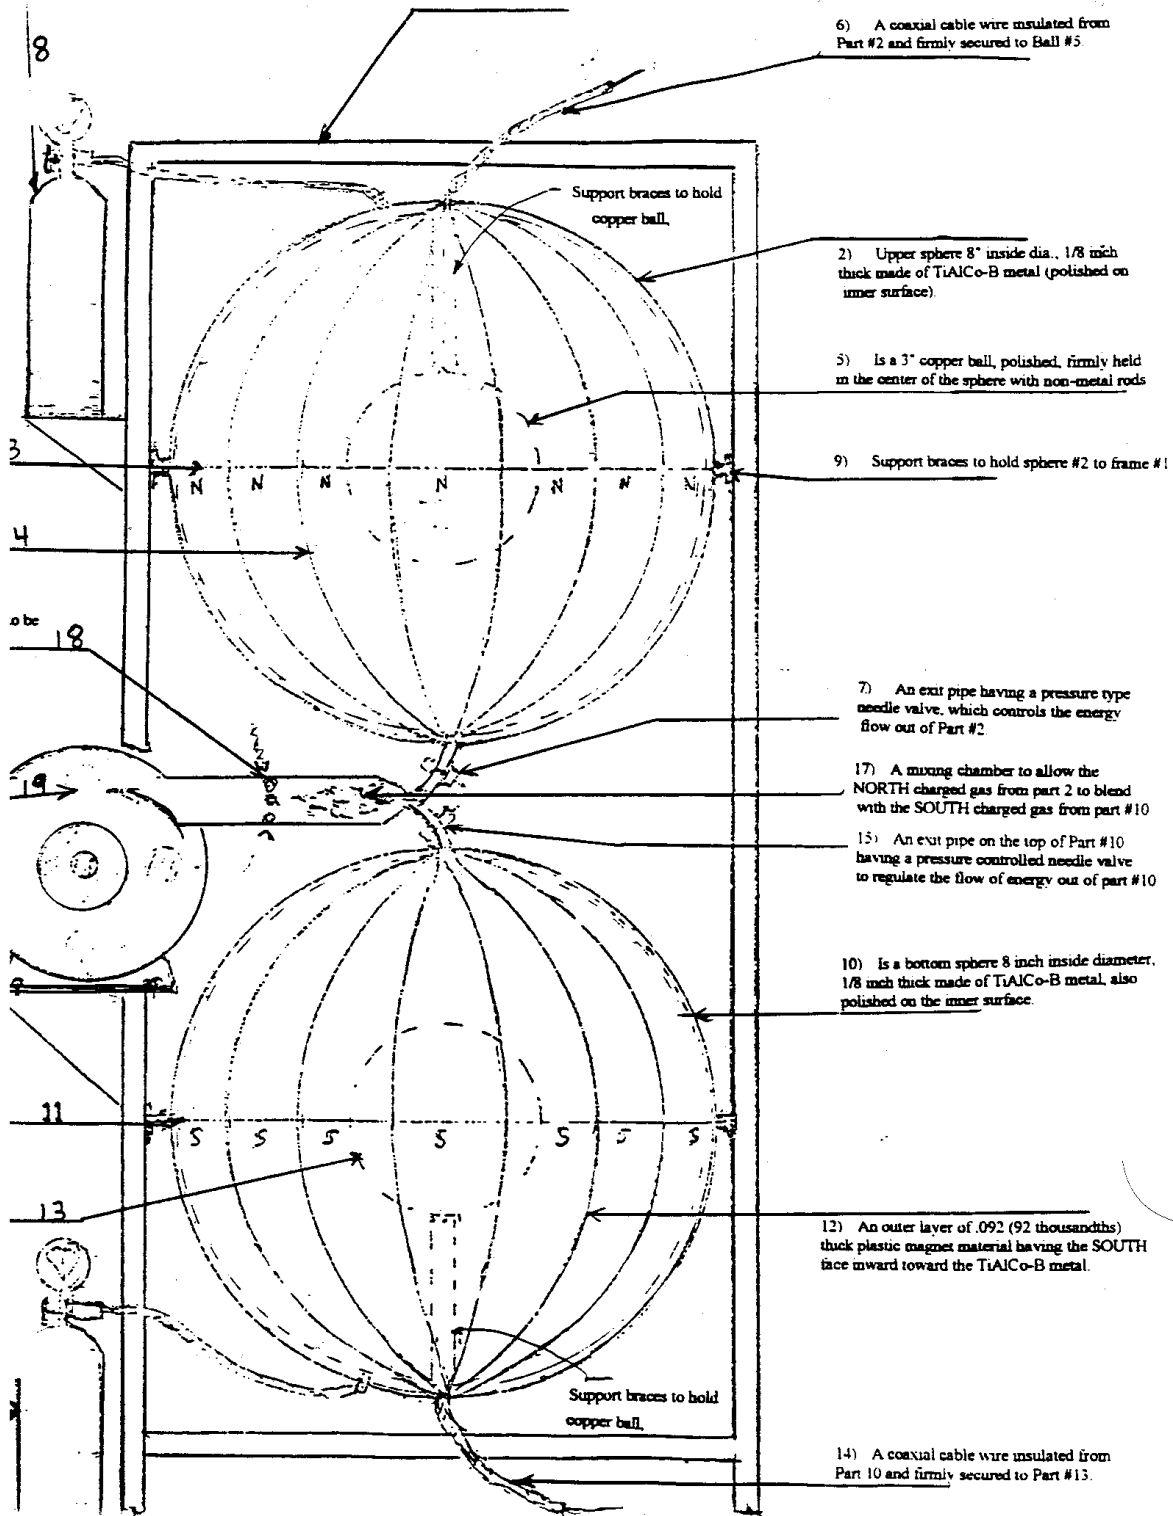

2) Upper sphere 8" inside dia., 1/8 inch thick made of TiAlCo-B metal (polished on inner surface)

5) Is a 3" copper ball, polished, firmly held in the center of the sphere with non-metal rods

9) Support braces to hold sphere #2 to frame #1

7) An exit pipe having a pressure type needle valve, which controls the energy flow out of Part #2

17) A mixing chamber to allow the NORTH charged gas from part 2 to blend with the SOUTH charged gas from part #10

15) An exit pipe on the top of Part #10 having a pressure controlled needle valve to regulate the flow of energy out of part #10

10) Is a bottom sphere 8 inch inside diameter, 1/8 inch thick made of TiAlCo-B metal, also polished on the inner surface.

12) An outer layer of .092 (92 thousandths) thick plastic magnet material having the SOUTH face inward toward the TiAlCo-B metal.

14) A coaxial cable wire insulated from Part 10 and firmly secured to Part #13.

